


Smooth Lift Cordless Roller



Mounting Dimensions

- Minimum depth for flush inside mount including installation brackets: 1 3/4"
- Minimum inside mounting depth: 1 1/4"
- Minimum outside mounting depth: 1"




Shades measuring 19 1/2" to 30":

A = 1 1/2"

B = 1 5/8"

C = 2 1/4"

D = 1 1/4" Roller

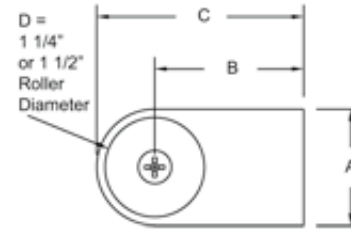

Shades measuring 30 1/8" to 95":

A = 1 3/4"

B = 1 3/4"

C = 2 3/4"

D = 1 1/2" Roller